


# FB Lead type, With Conductive Polymer Series

**Hi-CAP**

**FB** → **FJ**  
Low ESR  
High Cap.

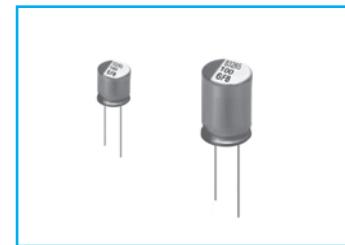


- Low ESR, high ripple current
- Load life for 2000 hours at 105°C
- Complied to the RoHS directive

| Item   | Characteristics                               |  |
|--|---|--|
| Operating temperature range  | -55 ~ +105°C                                  |  |
| Leakage current max.*  | Less than or equal to the value of Table1     |  |
| Capacitance tolerance  | ±20% at 120Hz, 20°C                           |  |
| Dissipation factor max.  | Less than or equal to the value of Table1     |  |
| ESR  | Less than or equal to the value of Table1     |  |
| Temperature characteristics<br>(Impedance ratio at 100kHz)   | Z-55°C / Z+20°C<br>0.75 ~ 1.25                | Z+105°C / Z+20°C<br>0.75 ~ 1.25  |
| Load life<br>(after application of the rated voltage for 2000 hours at 105°C,<br>In case of 25WV is applied 20V) | Leakage current<br>Capacitance change<br>tanδ | Less than specified value<br>Within ±20% of initial value<br>Less than 150% of specified value |

\* In case of some problems for measured values, measure the after applying rated voltage for 2.5 to 20V products or 20V derating voltage for 25V products for 120 minutes at 105°C.

## DRAWING

Unit : mm

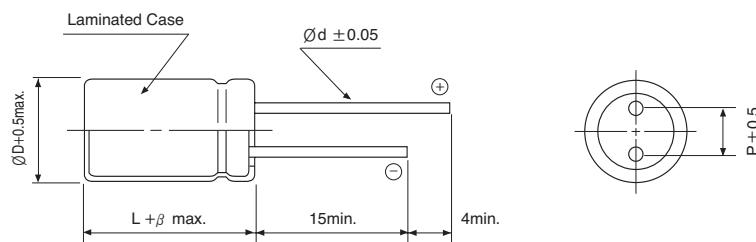

## PART NUMBER SYSTEM (See Page 52)

| Size  | ØD   | L    | P   | Ød   | β   |
|-------|------|------|-----|------|-----|
| 6.3×6 | 6.3  | 6.0  | 2.5 | 0.45 | 0.5 |
| 6.3×8 | 6.3  | 8.0  | 2.5 | 0.45 | 0.5 |
| 8×9   | 8.0  | 9.0  | 3.5 | 0.60 | 0.5 |
| 8×12  | 8.0  | 12.0 | 3.5 | 0.60 | 0.5 |
| 10×13 | 10.0 | 13.0 | 5.0 | 0.60 | 0.5 |

