

1 Scope:

- 1.1 This specification is applicable to lead free and halogen free of RoHS directive for LR-A3637 4 terminals metal alloy low-resistance resistor.
- 1.2 This product is for automotive electronic application.
- 1.3 AEC-Q200 qualified, grade 1.

2 Explanation Of Part Numbers:



| Type | Application | Size (inch) | Number of Terminals | Rated Power | Resistance (4~6 Digits) | Tolerance | Packaging |
|-------------------------------------|------------------|-------------|---------------------|-------------|-------------------------|----------------------|------------|
| Metal Alloy Low-Resistance Resistor | Automotive Grade | ●3637 | 4: 4 terminals | ● 3=3.0W | EX: R001 = 1mΩ | D=± 0.5% F=± 1.0% | 1=1,000pcs |

3 Product Specifications:


| Type | # of Terminals | Max. Rating Power | Max. Rating Current | Max. Overload Current | T.C.R. (ppm/°C) | Resistance Range (mΩ) | Operating Temperature Range |
|----------|----------------|-------------------|---------------------|-----------------------|-----------------|-----------------------|-----------------------------|
| | | | | | | D(±0.5%) F(±1%) | |
| LR-A3637 | 4 | 3W | 54.77A | 122.47A | 1 mΩ: ≤±75 | 1 | -55~170°C |

| | | | | | |
|---------|---------|----------|---------|--|---|
| IE | | QA | | Remark IT'S NOT UNDER CONTROL FOR PDF FILE PLS NOTE THE VERSION STATED.. Do not copy without permission | Issue Dep. DATA Center. Series No. 60 |
| Written | Checked | Approved | Signing | | |
| | | | | | |

3.1 Power Derating Curve:

Operating Temperature Range : - 55 ~+170 °C

For resistors operated in ambient temperatures 70°C, power rating shall be derated in accordance with the curve below:

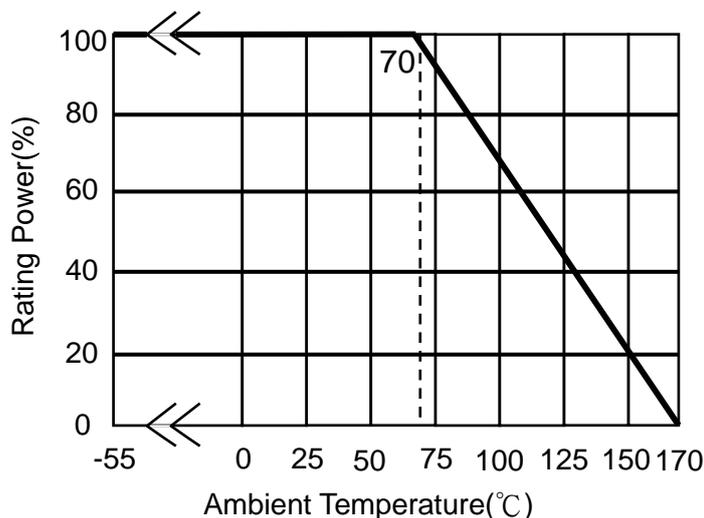

3.2 Rating Current:

The following equation may be used to determine the DC (Direct Current) or AC (Alternating Current) currents (RMS, root mean square value) of normal rated power. However, if the result value exceeds the highest current of regulated standards, the highest normal rated power is to be used.

Remark:

$$I = \sqrt{P/R}$$

I=Rating Current(A)
P= Rating Power(W)
R=Resistance(Ω)

Remark


IT'S NOT UNDER CONTROL FOR PDF FILE
PLS NOTE THE VERSION STATED..

Do not copy without permission

Issue Dep. DATA Center.

Series No. **60**

4 Physical Dimensions:

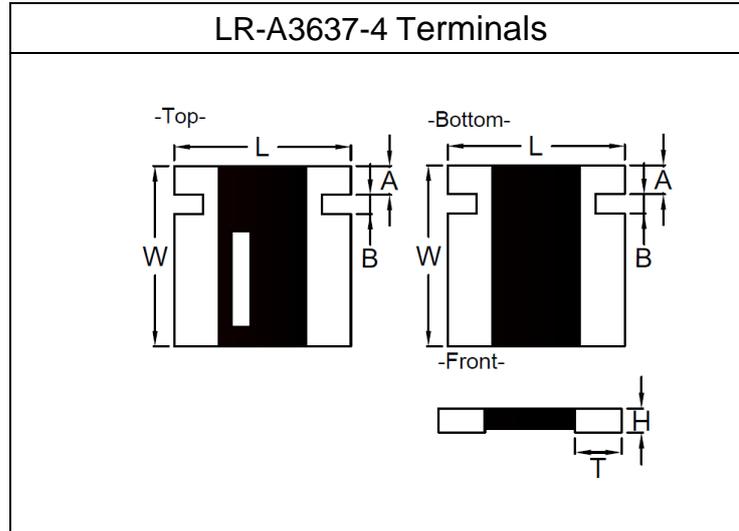

| Type | # of Terminals | Dimensions - in inches (millimeters) | | | | | |
|----------|----------------|--------------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| | | L | W | A | B | T | H |
| LR-A3637 | 4 | 0.360±0.010 (9.14±0.254) | 0.370±0.010 (9.40±0.254) | 0.059±0.010 (1.50±0.254) | 0.039±0.010 (1.00±0.254) | 0.091±0.010 (2.31±0.254) | 0.047±0.010 (1.20±0.254) |

4.1 Material of Alloy

| Type | # of Terminals | Watts | Material | Resistance |
|----------|----------------|-------|------------------------|------------|
| LR-A3637 | 4 | 3.0 | Copper-Manganese Alloy | 1mΩ |

Remark

IT'S NOT UNDER CONTROL FOR PDF FILE
PLS NOTE THE VERSION STATED..

Issue Dep. DATA Center.

Do not copy without permission


Series No. **60**

5 Reliability Performance:

| Test Item | Conditions of Test | Test Limits | | | | | | | |
|--|--|--|------------------|--------------------|----------------------------|---------------------|----------------------------|-----|---------|
| Short Time Overload | Applied Overload for 5 seconds and release the load for about 30 minutes, then measure its resistance variance rate. (Overload condition refer to below): | $\leq \pm 0.5\%$ | | | | | | | |
| | <table border="1" style="width:100%; border-collapse: collapse; margin-left: 20px;"> <tr> <td style="width:25%;">Type</td> <td style="width:25%;"># of Terminals</td> <td style="width:25%;">Power (W)</td> <td style="width:25%;"># of rated power</td> </tr> <tr> <td>LR-A3637</td> <td>4</td> <td>3.0</td> <td>5 times</td> </tr> </table> Refer to JIS C 5201-1 4.13 | Type | # of Terminals | Power (W) | # of rated power | LR-A3637 | 4 | 3.0 | 5 times |
| Type | # of Terminals | Power (W) | # of rated power | | | | | | |
| LR-A3637 | 4 | 3.0 | 5 times | | | | | | |
| Resistance to Solder Heat | The tested resistor be immersed 25 mm/sec into molten solder of $260 \pm 5^\circ\text{C}$ for 10 ± 1 secs. Then the resistor is left in the room for 1 hour, and measured its resistance variance rate. Refer to MIL-STD-202 Method 210 | $\leq \pm 0.5\%$ No evidence of mechanical damage | | | | | | | |
| Solderability | Add flux into tested resistors, immersion into solder bath in temperature $245 \pm 5^\circ\text{C}$ for 3 ± 0.5 secs. Refer to J-STD-002 | Solder coverage over 95% | | | | | | | |
| Vibration | The resistor shall be mounted by its terminal leads to the supporting terminals on the solid table. The entire frequency range :from 10 Hz to 55 Hz and return to 10 Hz, shall be transferred in 1 min. Amplitude : 1.5mm This motion shall be applied for a period of 4 hours in each 3 mutually perpendicular directions (a total of 12hrs) Refer to MIL-STD-202 Method 204 | $\leq \pm 0.5\%$ | | | | | | | |
| | | No evidence of mechanical damage | | | | | | | |
| High Temperature Exposure (Storage) | Put tested resistor in chamber under temperature $170 \pm 5^\circ\text{C}$ for 1,000 hours. Then leaving the tested resistor in room temperature for 60 minutes , and measure its resistance variance rate. Refer to MIL-STD-202 Method 108 | $\leq \pm 0.5\%$ No evidence of mechanical damage | | | | | | | |
| Temperature Cycling (Rapid Temperature Change) | Put the tested resistor in the chamber under the temperature cycling which shown in the following table shall be repeated 1,000 times consecutively. Then leaving the tested resistor in the room temperature for 60 minutes, and measure its resistance variance rate. | $\leq \pm 0.5\%$ | | | | | | | |
| | | No evidence of mechanical damage | | | | | | | |
| | <table border="1" style="width:100%; border-collapse: collapse; margin-left: 20px;"> <tr> <th colspan="2" style="text-align: center;">Testing Condition</th> </tr> <tr> <td style="width:50%;">Lowest Temperature</td> <td style="width:50%; text-align: center;">$-55 +0/-10^\circ\text{C}$</td> </tr> <tr> <td>Highest Temperature</td> <td style="text-align: center;">$150 +10/-0^\circ\text{C}$</td> </tr> </table> Refer to JESD22 Method JA-104 | Testing Condition | | Lowest Temperature | $-55 +0/-10^\circ\text{C}$ | Highest Temperature | $150 +10/-0^\circ\text{C}$ | | |
| Testing Condition | | | | | | | | | |
| Lowest Temperature | $-55 +0/-10^\circ\text{C}$ | | | | | | | | |
| Highest Temperature | $150 +10/-0^\circ\text{C}$ | | | | | | | | |
| Moisture Resistance (Climatic Sequence) | Put the tested resistor in chamber and subject to 10 cycles of damp heat and without power. Each one of which consists of the steps 1 to 7 (Figure 1). Then leaving the tested resistor in room temperature for 24 hr, and measure its resistance variance rate. Refer to MIL-STD 202 Method 106 | $\leq \pm 0.5\%$ No evidence of mechanical damage | | | | | | | |
| Bias Humidity | Put the tested resistor in chamber under $85 \pm 5^\circ\text{C}$ and $85 \pm 5\%$ RH with 10% bias and load the rated current for 90 minutes on, 30 minutes off, total 1,000 hours. Then leaving the tested resistor in room temperature for 60 minutes, and measure its resistance variance rate. Refer to MIL-STD-202 Method 103 | $\leq \pm 0.5\%$ | | | | | | | |
| | | No evidence of mechanical damage | | | | | | | |


| | | |
|------------------|---|----------------------------------|
| Operational Life | Put the tested resistor in chamber under temperature $70 \pm 2^\circ\text{C}$ and load the rated current for 90 minutes on 30 minutes off, total 1000 hours. Then leaving the tested resistor in room temperature for 60 minutes, and measure its resistance variance rate. Refer to MIL-STD-202 Method 108 | $\leq \pm 1.0\%$ |
| | | No evidence of mechanical damage |

6 Measurement Point :
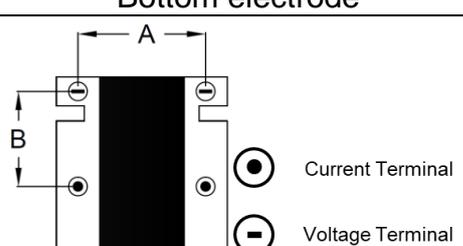
| | | | |
|---|-------------|-----------------|-----------------|
|  | Unit : mm | | |
| | DIM | A | B |
| Type | LR-A3637-4T | 6.82 ± 0.10 | 5.10 ± 0.10 |

7 Taping specifications:


7.1 Tape Dimensions:

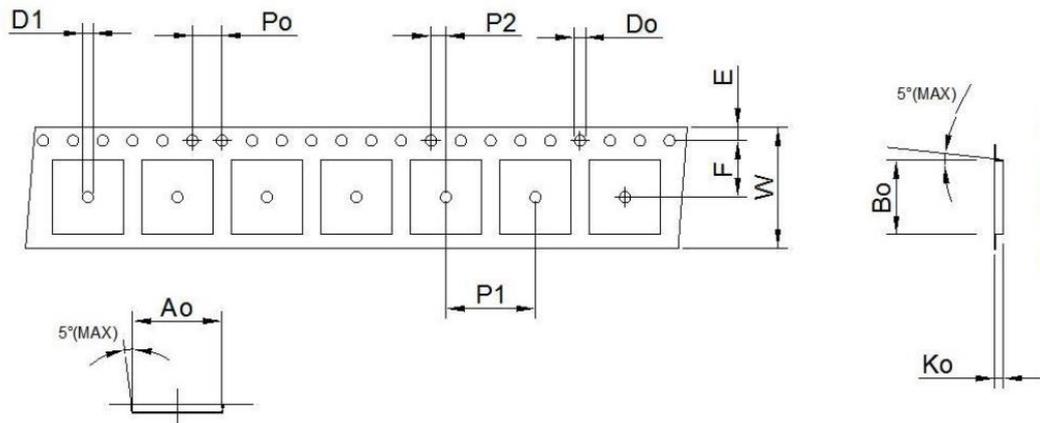

Unit: mm

| TYPE | DIM | Ao | Bo | W | E | F | Ko | Po | P1 | P2 | Do | D1 |
|------------|-----|---------------|---------------|----------------|----------------|---------------|---------|---------------|----------------|---------------|---------------|---------|
| LR-A3637-4 | | 9.6 ± 0.1 | 9.9 ± 0.1 | 16.0 ± 0.2 | 1.75 ± 0.1 | 7.5 ± 0.1 | 1.5 Max | 4.0 ± 0.1 | 12.0 ± 0.1 | 2.0 ± 0.1 | 1.5 ± 0.1 | 1.5 Max |

7.2 Lead Dimensions:

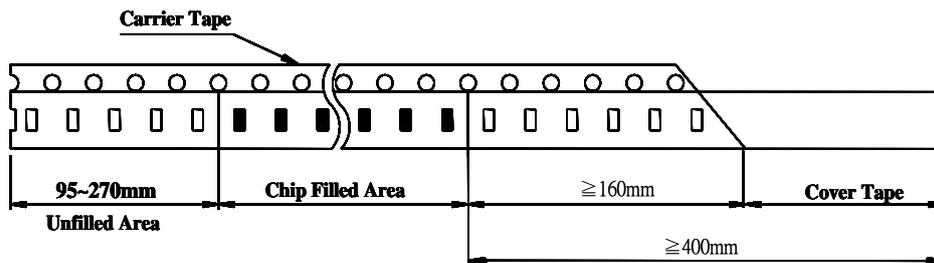

Remark


IT'S NOT UNDER CONTROL FOR PDF FILE
PLS NOTE THE VERSION STATED..

Issue Dep. DATA Center.

Do not copy without permission

Series No. **60**


7.3 Cover Tape Peel off Strength:
Specification value: 0.3~1.0N(30~100gf)

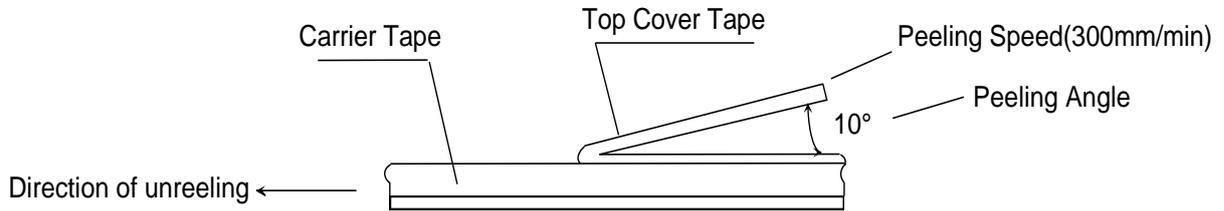

7.4 Packaging model:



| Type | # of Terminals | Tape width | Max. Packaging Quantity (pcs/reel) |
|----------|----------------|------------|------------------------------------|
| | | | Embossed Plastic Type |
| LR-A3637 | 4 | 16mm | 4mm pitch |
| | | | 1000 |

7.5 Reel Dimensions:

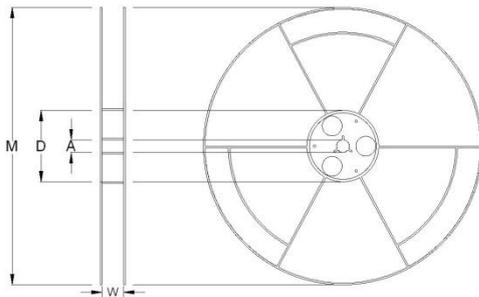

| Reel Type / Tape | W | M | A | D |
|------------------------|------------|-----------|------------|------------|
| 7" reel for 16 mm tape | 17.4 ± 1.0 | 178 ± 2.0 | 13.2 ± 0.5 | 60.0 ± 1.0 |

7.6 Label:

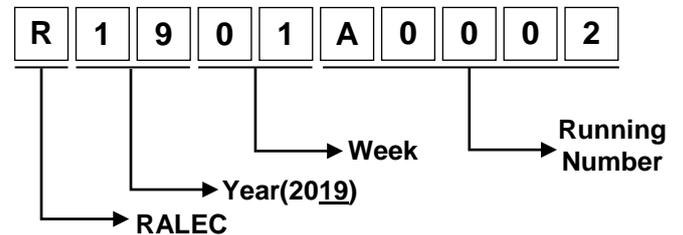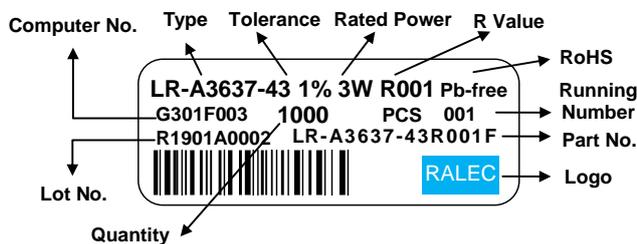

Remark

IT'S NOT UNDER CONTROL FOR PDF FILE
PLS NOTE THE VERSION STATED..

Issue Dep. DATA Center.


Do not copy without permission

Series No. **60**


8 Technical application note (This is for recommendation, please customer perform adjustment according to actual application)

8.1 Recommend soldering method:

8.1.1 Typical examples of soldering processes that provides reliable joints without any damage are given in below:

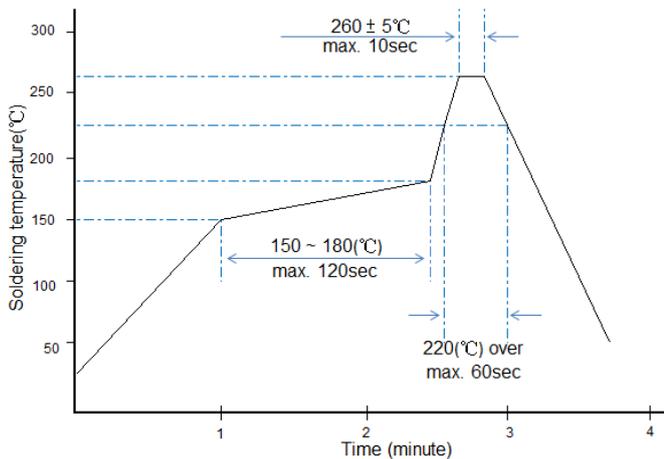

Recommended IR Reflow Soldering Profile

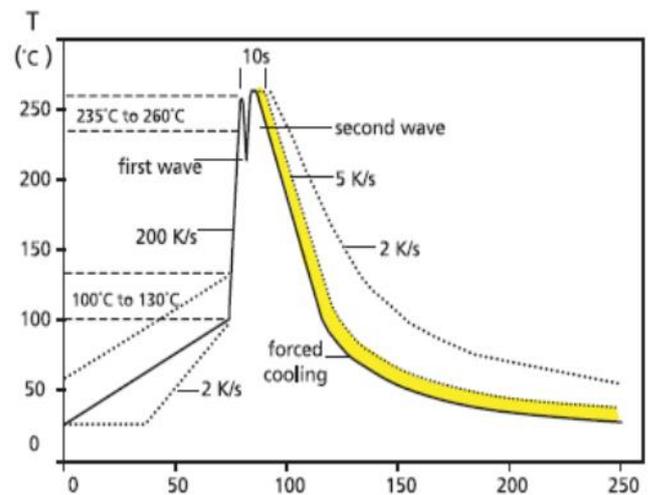

Recommended double-wave Soldering Profile


Typical values (solid line)

Process limits (dotted line)

8.1.2 Soldering Iron: temperature 350°C±10°C, dwell time shall be less than 3 sec.

8.2 Recommend Land Pattern:

When a component is soldered, the resistance after soldering changes slightly depending on the size of the soldering area and the amount of soldering. When designing a circuit, it is necessary to consider the effect of a decrease or increase in its resistance

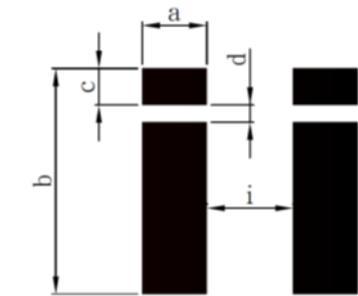

| Type | # of Terminals | Maximum Power Rating (Watts) | Resistance Range (mΩ) | Dimensions - in millimeters | | | | |
|----------|----------------|------------------------------|-----------------------|-----------------------------|------|------|------|------|
| | | | | a | b | c | d | i |
| LR-A3637 | 4 | 3 | 1 | 2.95 | 9.90 | 1.68 | 0.60 | 4.50 |

Remark

IT'S NOT UNDER CONTROL FOR PDF FILE
PLS NOTE THE VERSION STATED..

Issue Dep. DATA Center.

Do not copy without permission

Series No. **60**

| | | | |
|-------------|--|---------------|------------|
| RALEC 旺詮 | LR-A3637 Metal Alloy Low-Resistance Resistor Product Specifications (Automotive Grade) | Document No. | IE-SP-174 |
| | | Released Date | 2020/01/10 |
| | | Page No. | 8 |

8.3 Automobile Electronic Application:

This specification is for automobile electronic use. RALEC will take no responsibility if any damage, cost or loss occurs when the product has been used in any special circumstances.

8.4 Environment Precautions:

If consumer intends to use our company product in special environment or condition (including but not limited to those mentioned below), then will need to make individual recognition of product features and reliability accordingly.

- (a) Used in high temperature and humidity environment
- (b) Exposed to sea breeze or other corrosive gas, such as Cl₂、H₂S、NH₃、SO₂ and NO₂.
- (c) Used in non-verified liquids including water, oil, chemical and organic solvents.
- (d) Using non-verified resin or other coating material to seal or coat our Company product.
- (e) After soldering, it is necessary to use water-soluble detergents to clean residual solder fluxes, even though no-clean fluxes are recommended.

8.5 Momentary Overload Precautions:

The product might be out of function when momentary overloaded. Please make sure to avoid momentary overloading while using and preserving。

8.6 Operation and Processing Precautions:

- (a) Avoid damage to the edge of resistor and protective layer caused by mechanical stress.
- (b) Handle with care when printing circuit board (PCB) is divided or fixed on support body, because bending of printing circuit board (PCB) mounting will make mechanical stress for resistors.
- (c) Make sure the power rating is under the limit when using the resistor. When power rating is over the limit, the resistor will be overloaded. There might be machinery damage due to the climbing temperature.
- (d) If the resistor will be exposed under massive impact load (shock wave) in a short period of time, the working environment must be set up well before use.
- (e) Please make evaluation and confirmation when the product is well used in your company and have a through consideration of it's fail-safe design to ensure the system safety.

9 Storage and transportation requirement:

9.1 The temperature condition must be controlled at 25±5℃, the R.H. must be controlled at 60±15%. The stock can maintain quality level in two years。

| | | |
|--------|--|-------------------------|
| Remark | IT'S NOT UNDER CONTROL FOR PDF FILE PLS NOTE THE VERSION STATED.. | Issue Dep. DATA Center. |
| | Do not copy without permission | Series No. 60 |

| | | | |
|-------------|--|---------------|------------|
| RALEC 旺詮 | LR-A3637 Metal Alloy Low-Resistance Resistor Product Specifications (Automotive Grade) | Document No. | IE-SP-174 |
| | | Released Date | 2020/01/10 |
| | | Page No. | 9 |

9.2 Please avoid the mentioned harsh environment below when storing to ensure product performance and its' weldability. Places exposed to sea breeze or other corrosive gas, such as Cl2、H2S、NH3、SO2 and NO2.

9.3 When the product is moved and stored, please ensure the correct orientation of the box. Do not drop or squeeze the box. Otherwise, the electrode or the body of the product may be damaged.

10 Attachments

10.1 Document Revise Record (QA-QR-027)

| | | |
|--------|--|-------------------------|
| Remark | IT'S NOT UNDER CONTROL FOR PDF FILE PLS NOTE THE VERSION STATED.. | Issue Dep. DATA Center. |
| | Do not copy without permission | Series No. 60 |

| | | | |
|--------------------|---|----------------------|-------------------|
| RALEC 旺詮 | LR-A3637 Metal Alloy Low-Resistance Resistor Product Specifications (Automotive Grade) | Document No. | IE-SP-174 |
| | | Released Date | 2020/01/10 |
| | | Page No. | 10 |

Legal disclaimer

RALEC, its distributors and agents (collectively, "RALEC"), hereby disclaims any and all liabilities for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics. RALEC may make changes, modifications and/or improvements to product related information at any time and without notice.

RALEC makes no representation, warranty, and/or guarantee about the fitness of its products for any particular purpose or the continuing production of any of its products. To the maximum extent permitted by law, RALEC disclaims (i) any and all liability arising out of the application or use of any RALEC product, (ii) any and all liability, including without limitation liability for any loss of profits or for direct, indirect, special, punitive, consequential or incidental damages arising out of or related to RALEC products, and (iii) any and all implied warranties, including warranties of fitness for a particular purpose, non-infringement and merchantability.

RALEC defined this product is for automotive electronic use , not design for any application for medical life-saving or life support equipment, or any application which may inflict casualties if RALEC product failure occurred. Any and all technical advice furnished by RALEC with reference to the use of RALEC products are given free of charge and RALEC assumes no obligation or liability for the advice given or results obtained, and all such advice are given and accepted at buyer's risk. Buyer shall assume all risk and liability for the results obtained by the use of any RALEC products in combination with other articles or material or in the practice of any process, regardless of any oral or written technical statement made by RALEC with respect to the use of such products by way of technical advice or otherwise. Further, buyer represents and warrants that it has the experience and capacity of determining the correct product for its intended application.

Information provided here is intended to indicate product specifications only. RALEC reserves all the rights for revising this content without further notification, as long as products are unchanged. Any product change will be announced by ECN.

| | | |
|---------------|--|--------------------------------|
| Remark | IT'S NOT UNDER CONTROL FOR PDF FILE PLS NOTE THE VERSION STATED.. | Issue Dep. DATA Center. |
| | Do not copy without permission | Series No. 60 |