

CG Chip type, Miniaturization Series

Solvent Proof

- Chip type, miniaturized temperature range up to 105°C
- Applicable to automatic insertion machine using carrier tape
- Complied to the RoHS directive

CD → CG
miniaturized




Item	Characteristics												
Operating temperature range	-55 ~ +105°C												
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)												
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C												
Dissipation factor max. (at 120Hz, 20°C)	WV	6.3	10	16	25	35	50						
	$\tan\delta$	0.24	0.19	0.16	0.14	0.12	0.12						
Low temperature characteristics (Impedance ratio at 120Hz)	WV	6.3	10	16	25	35	50						
	Z-25°C/Z+20°C	2	2	2	2	2	2						
	Z-55°C/Z+20°C	3	3	3	3	3	3						
Load life (after application of the rated voltage for 2000 hours at 105°C)	Leakage current	Less than specified value											
	Capacitance change	Within $\pm 30\%$ of initial value											
	$\tan\delta$	Less than 200% of specified value											
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4												
Resistance to soldering heat	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 250°C for 10 seconds.												
	Leakage current	Less than specified value											
	Capacitance change	Within $\pm 10\%$ of initial value											
	$\tan\delta$	Less than specified value											

DRAWING

Unit : mm


-Series code of CG is "CG"

($\varnothing 6.3 \times 7.7$)

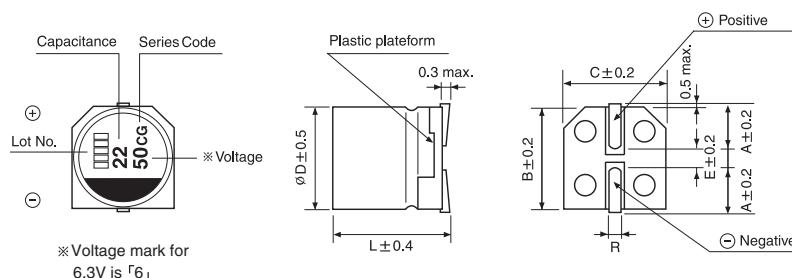

$\varnothing D$	A	B	C	E	R
6.3 × 7.7	2.4	6.6	6.6	2.2	0.5~0.8
8 × 10	2.9	8.3	8.3	3.1	0.8~1.1
10 × 10	3.2	10.3	10.3	4.5	0.8~1.1

($\varnothing 8 \times 10$, $\varnothing 10 \times 10$)

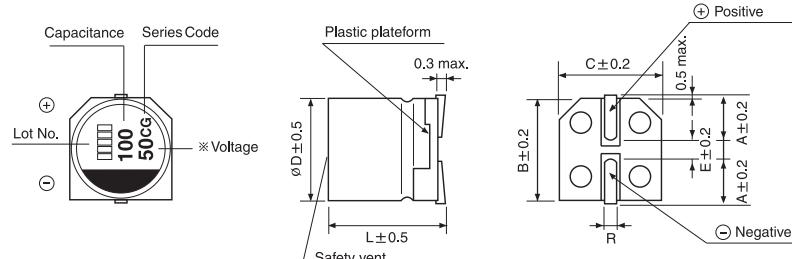

SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS

CG series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	6.3			10			16			25			35			50		
100																	6.3×7.7	0.34	350
150											6.3×7.7	0.16	600	6.3×7.7	0.16	600			
220											6.3×7.7	0.16	600				8×10	0.18	670
330				6.3×7.7	0.16	600	6.3×7.7	0.16	600					8×10	0.08	850	10×10	0.12	900
470	6.3×7.7	0.16	600	6.3×7.7	0.16	600				8×10	0.08	850							
560														10×10	0.06	1190			
680	6.3×7.7	0.16	600				8×10	0.08	850					10×10	0.075	1190			
820										10×10	0.06	1190							
1000				8×10	0.08	850	10×10	0.06	1190										
1500	8×10	0.08	850	10×10	0.06	1190													
2200	10×10	0.06	1190																

Ripple current (mA rms) at 105°C, 100kHz

Impedance (Ω) at 20°C, 100kHz

Case size ØD X L (mm)

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz \leq
Coefficient	0.35	0.5	0.64	0.83	1.00