

CM Chip type, Low Impedance Long Life Series

LZI
Low Impedance
S
Solvent Proof

CD → CM
Long life



- Chip type, low impedance temperature range up to 105°C
- Designed for surface mounting on high density PC board
- Applicable to automatic insertion machine using carrier tape
- Complied to the RoHS directive



Item	Characteristics							
Operating temperature range	-55 ~ +105°C							
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)							
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C							
Dissipation factor max. (at 120Hz, 20°C)	WV	6.3	10	16	25	35	50	63 ~ 100
	$\tan\delta$	0.26	0.19	0.16	0.14	0.13	0.12	0.10
Low temperature characteristics (Impedance ratio at 120Hz)	WV	6.3	10	16	25	35	50	63 ~ 100
	Z-25°C/Z+20°C	2	2	2	2	2	2	2
	Z-55°C/Z+20°C	4	4	4	3	3	3	3
Load life (after application of the rated voltage for 5000 hours at 105°C)	Leakage current	Less than specified value						
	Capacitance change	Within $\pm 30\%$ of the initial value						
	$\tan\delta$	Less than 250% of the specified value						
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value.							

DRAWING

Unit : mm



-Series code of CM is "M"

(Ø6.3, Ø8×6.2)

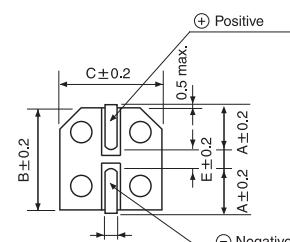
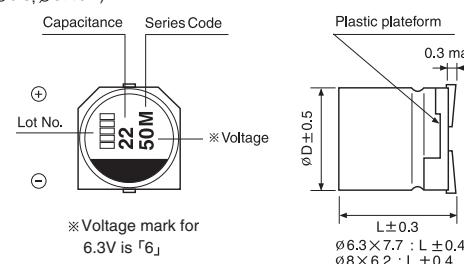


$\varnothing D \times L$	A	B	C	E	R
6.3×5.8	2.4	6.6	6.6	2.2	0.5~0.8
6.3×7.7	2.4	6.6	6.6	2.2	0.5~0.8
8×6.2	3.4	8.3	8.3	2.3	0.5~0.8
8×10	2.9	8.3	8.3	3.1	0.8~1.1
10×10	3.2	10.3	10.3	4.5	0.8~1.1
12.5×13.5	4.6	12.8	12.8	4.5	1.3~1.6

(Ø8×10, Ø10×10)

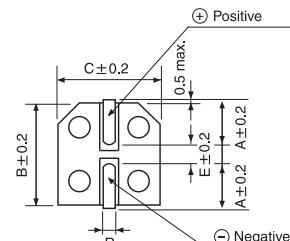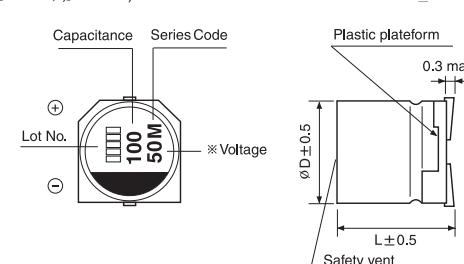

(Ø12.5)

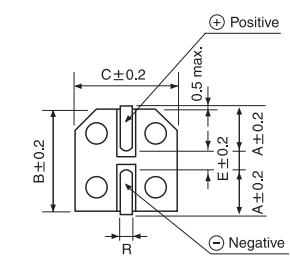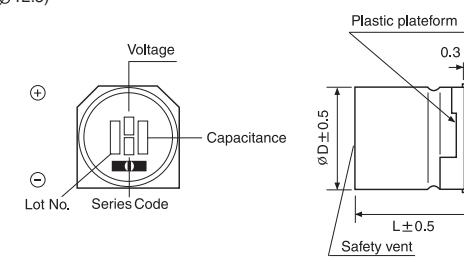

SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS

CM series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	6.3			10			16			25			35			50		
2.2																	4×5.3	6.00	30
10														5×5.3	2.00	160	6.3×5.8	1.00	170
15																	6.3×5.8	0.86	170
22														6.3×5.3	1.00	160	6.3×5.8	0.86	170
33								5×5.3	1.50	150				6.3×5.3	0.85	220	6.3×7.7	0.66	280
								6.3×5.8	0.43	240				6.3×5.8	0.44	240	8×6.2	0.63	300
47					6.3×5.8	0.43	240	6.3×5.8	0.43	240	6.3×5.3	0.60	220	6.3×5.8	0.44	240	6.3×7.7	0.66	280
								6.3×5.8	0.43	240	6.3×5.8	0.43	240	8×6.2	0.63	300			
68	6.3×5.8	0.43	240	6.3×5.8	0.39	240	6.3×5.8	0.39	240	6.3×5.8	0.39	240	6.3×7.7	0.32	290	8×10	0.32	450	
								8×6.2	0.38	300				8×10	0.32	450			
100	6.3×5.8	0.43	240	6.3×5.8	0.39	240	6.3×5.8	0.39	240	6.3×7.7	0.32	290	6.3×7.7	0.32	290	8×10	0.32	450	
								8×6.2	0.26	300	8×10	0.16	600	8×10	0.16	600	10×10	0.20	700
150	6.3×5.8	0.43	240	6.3×5.8	0.39	240	6.3×7.7	0.32	290	8×10	0.16	600	8×10	0.16	600	10×10	0.20	700	
220	6.3×5.8	0.43	240	6.3×7.7	0.36	290	6.3×7.7	0.32	290	8×10	0.16	600	8×10	0.16	600	10×10	0.20	700	
				8×6.2	0.26	300	8×6.2	0.26	300	10×10	0.15	700	10×10	0.08	850				
330	6.3×7.7	0.32	290	8×10	0.16	600	8×10	0.16	600	8×10	0.16	600	10×10	0.10	850	12.5×13.5	0.16	800	
				8×6.2	0.26	300				10×10	0.08	850							
470	8×10	0.16	600	8×10	0.16	600	8×10	0.16	600	10×10	0.10	850	10×10	0.10	850				
							10×10	0.08	850				12.5×13.5	0.08	900				
680	8×10	0.16	600	8×10	0.16	600	10×10	0.08	850	10×10	0.10	850	12.5×13.5	0.08	900				
				10×10	0.08	850													
1000	8×10	0.17	450	10×10	0.08	850	12.5×13.5	0.08	900	12.5×13.5	0.10	900	12.5×13.5	0.08	900				
				10×10	0.08	850													
1500	10×10	0.08	850				12.5×13.5	0.08	900										
2200				12.5×13.5	0.08	1000													
3300				12.5×13.5	0.06	1100													

↑ ↑ ↑
 Ripple current (mA rms) at 105°C, 100kHz
 Impedance (Ω) at 20°C, 100kHz
 Case size $\phi D \times L$ (mm)

μF	WV	63			80			100		
10		6.3×7.7	2.1	80	8×10	1.3	130	8×10	2.0	140
22		6.3×7.7	2.1	120	8×10	1.3	130	10×10	1.5	330
33		8×10	1.0	250	10×10	1.0	200	12.5×13.5	1.0	500
47		8×10	1.0	250	12.5×13.5	0.8	500	12.5×13.5	1.0	500
68		10×10	0.8	400	12.5×13.5	0.8	500	12.5×13.5	1.0	500
100		10×10	0.8	400	12.5×13.5	0.8	500	12.5×13.5	1.0	500
150		12.5×13.5	0.6	800	12.5×13.5	0.8	500			
220		12.5×13.5	0.6	800						

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz \leq
Coefficient	0.35	0.50	0.64	0.83	1.00