

# CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS

**YF** Lead type, Ultra High Temperature Series




- High temperature range, for 150°C use
- Complied to the RoHS directive

Item	Characteristics				
Operating temperature range	-55 ~ +150°C				
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)				
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C				
Dissipation factor max. (at 120Hz, 20°C)	WV	25	35	50	63
	$\tan\delta$	0.14	0.12	0.1	0.08
Low temperature characteristics (Impedance ratio at 100kHz)	$Z(-25°C) / Z(+20°C) \leq 1.5$ $Z(-55°C) / Z(+20°C) \leq 2.0$				
Load life	After an application of DC bias voltage plus the rated AC ripple current for 1000 hours at 150°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.				
	Capacitance change	Within $\pm 30\%$ of initial value			
	$\tan\delta$	Less than 200% of the specified value			
	ESR	Less than 200% of the specified value			
	Leakage current	Less than specified value			
Shelf life(at 150°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4				

## DRAWING

Unit : mm

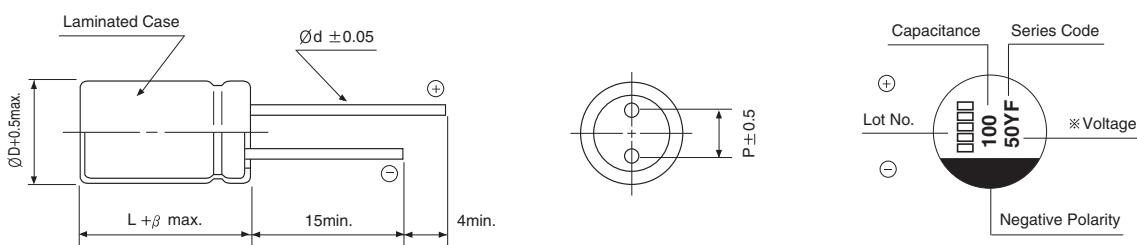

Size	ØD	L	P	Ød	$\beta$
6.3×7.5	6.3	7.5	2.5	0.45	1.5
8×9.5	8	9.5	3.5	0.60	1.5
10×9.5	10.0	9.5	5.0	0.60	1.5

## PACKING & TAPING (See page 88~90)

## DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

$\mu F$	WV	25		35		50		63		
15								6.3×7.5	80	410
22								8×9.5	40	610
33								10×9.5	30	710
47			6.3×7.5	60	510					
56						8×9.5	35	660		
68	6.3×7.5	45	540							
100				8×9.5	30	710	10×9.5	28	780	
150	8×9.5	27	740	10×9.5	23	830				
270	10×9.5	22	850							

Ripple current (mA rms) at 150°C, 100kHz  
ESR ( $m\Omega$ ) at 20°C, 100kHz  
Case size  $\text{ØD} \times \text{L}$  (mm)

## FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	120Hz	1kHz	10kHz	100kHz
Coefficient	0.05	0.30	0.70	1.00