

AM



 For Hi-Fi Component System Series


- For high grade audio equipment
- High resonance frequency, low ESR and low impedance
- For AMP, AVR
- Snap-in terminal type
- Voltage range of 16~100V
- Complied to the RoHS directive




Item	Characteristics				
Operating temperature range	-40 ~ +85°C				
Capacitance tolerance	±20% at 120Hz, 20°C				
Leakage current max.	$I = 3\sqrt{CV} (\mu A)$ (after 5 minutes)				
Dissipation factor max. (at 120Hz, 20°C)	WV	16	25 ~ 35	50 ~ 71	80 ~ 100
	$\tan\delta$	0.25	0.22	0.20	0.15
Charge and discharge characteristics	After charge and discharge for 5000 cycles at 70°C with application of the rated voltage, the capacitors shall be satisfied the following specifications.				
	Appearance	No visible damage and no leakage electrolyte			
	Leakage current	Less than specified value			
	Capacitance change	Within ±15% of initial value			
	$\tan\delta$	Less than 150% of specified value			
Load life (after application of the rated voltage for 2000 hours at 85°C)	Conditions				
	Charge resistance : 4Ω	Applied current : 1A			
	Discharge resistance : 100Ω	Charge and discharge time : 60sec. (each)			
	Leakage current	Less than specified value			
Shelf life (at 85°C)	Capacitance change	Within ±20% of initial value			
	$\tan\delta$	Less than 200% of specified value			
	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4				

● DRAWING

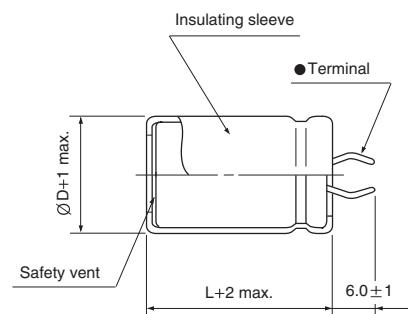

PC Board
Mounting Holes

● Terminal

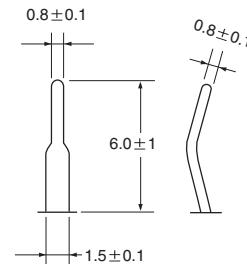

Unit : mm

● DIMENSIONS

ØD × L(mm)

$\mu F \backslash WV$	16	25	35	50	63	80	100
470							22 × 40
680							22 × 40
1000					22 × 40	25.4 × 40	25.4 × 50
1500				22 × 40	25.4 × 40	25.4 × 50	30 × 50
2200			22 × 40	25.4 × 40	25.4 × 50	30 × 50	35 × 50
3300		22 × 40	25.4 × 40	25.4 × 50	30 × 50	30 × 60	35 × 60
4700		25.4 × 40	25.4 × 50	30 × 50	30 × 60	35 × 60	
6800	22 × 40	25.4 × 50	30 × 50	30 × 60	35 × 60		
8200	25.4 × 40	30 × 50	35 × 50	35 × 60	35 × 60		
10000	25.4 × 50	35 × 50	35 × 60	35 × 60			
12000	30 × 50	35 × 50	35 × 60				
15000	35 × 50	35 × 60					
22000	35 × 60						
33000	35 × 60						