

BTB Series Thermal Fuse




Features


The following product specifications apply to fuses of the BTB series. The BTB series consists of thermal cutoff fuses for over-temperature protection. The BTB series thermal fuses are widely used in various applications such as transformers, adapters, secondary batteries, household appliances, gas water heaters, lighting and other heating equipment.

Application

The BTB thermal cutoff fuses are non-resetting single-pole and normally closed devices and provide accurate, reliable protection for high temperature applications against overheating through interrupting electric current. With their metal body and strong leads these fuses offer a sturdy built and high rated currents such as 2 Ampere

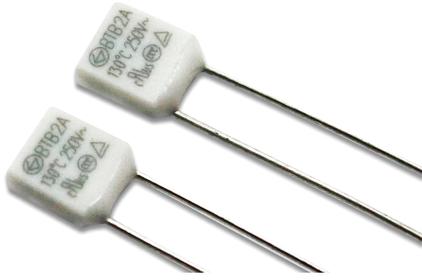

Dimensions (unit in mm)

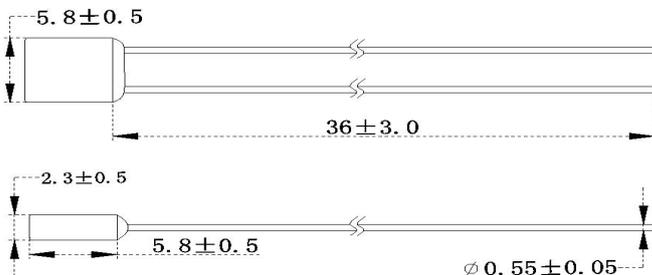

Part numbering system

4.1 Part Number

Example: BTB2021150

BT	B	2	02	115	0
(1)	(2)	(3)	(4)	(5)	(6)
(1) ModelBT...	Better's Brand			
(2) Product TypeB...	Thermal Fuse			
(3) Product Color2...	White shell			
(4) Current Rating02...	2A			
(5) Functional Temperature...	...115...	Tf: 115°C			
(6) Complement Code0...	Normal			

BT	B	2	02	115	0
Better	A: 1A series B: 2A series	1: black shell 2: white shell		TF temperature	Serial number



Electrical Characteristics at 25°C

NO.	Part number	Tf (°C)	Operating Temperature (°C)	Th (°C)	Tm (°C)	Rated Current (A)	Voltage (V)	Approvals					
								UL/C-UL	TUV	CCC	PSE	KC	VDE
1	BTB 102°C	102	98±2	80	203	2A	250V~	•	•	•	•	○	○
2	BTB 115°C	115	111±2	100	203	2A	250V~	•	•	•	•	•	•
3	BTB 125°C	125	120±2	106	203	2A	250V~	•	•	•	•	•	•
4	BTB 130°C	130	125±2	108	203	2A	250V~	•	•	•	•	•	•
5	BTB 135°C	135	131±2	116	203	2A	250V~	•	•	•	•	•	○
6	BTB 145°C	145	140±2	127	203	2A	250V~	•	•	•	•	•	○
7	BTB 150°C	150	144±2	129	203	2A	250V~	•	•	•	•	•	○

Note: 1. ○ means pending

2. In UL certification, the Voltage also including AC 125V and DC 60V (DC 60V is limited to 115C and 125C)

3. • means approved

Ordering Information

Series	Function temperature (Tf)	Supplementary Code	Qty
BTB			

