



乐山无线电股份有限公司
Leshan Radio Company, Ltd

SB220 thru SB2100

Schottky Barrier Rectifiers
Reverse Voltage 20 to 100V

Feature & Dimensions

- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * Low power loss, high efficiency
- * For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- * Guarding for over voltage protection
- * High temperature soldering guaranteed: 260°C/10 seconds at terminals

Mechanical Data

Case: JEDEC DO-15, molded plastic over sky die


Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.015 oz., 0.40 g

Handling precaution: None

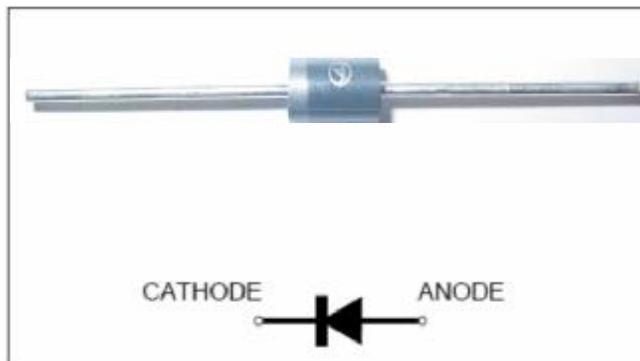

We declare that the material of product compliance with ROHS requirements

1. Maximum & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	SB220	SB230	SB240	SB250	SB260	SB280	SB290	SB2100	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	90	100	V
Maximum RSM voltage	V _{RSM}	14	21	28	35	42	56	63	70	V
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	90	100	V
Maximum average forward rectified current 0.375" (9.5mm) lead length (See fig. 1)	I _{F(AV)}						2.0			A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}						60			A
Typical thermal resistance (Note 1)	R _{θJA}					50				°C/W
Operating temperature range	T _J				-55 to +150					°C
storage temperature range	T _{STG}				-55 to +150					°C

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	SB220	SB230	SB240	SB250	SB260	SB280	SB290	SB2100	Unit
Maximum instantaneous forward voltage at 2.0A	V _F		0.50		0.70		0.85			V
Maximum DC reverse current TA = 25°C at rated DC blocking voltage TA = 100°C	I _R				0.5					mA
Typical junction capacitance at 4.0V, 1MHz	C _J				20		60			PF

NOTES:

- Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

SB220 thru SB2100

2. Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 - Forward Current Derating Curve

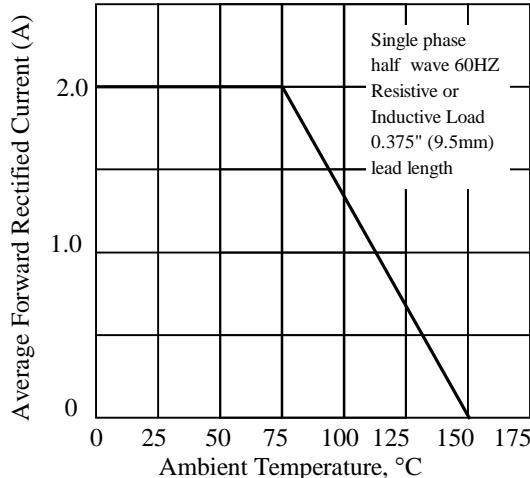


Fig. 3. - Typical Instantaneous Forward Characteristics

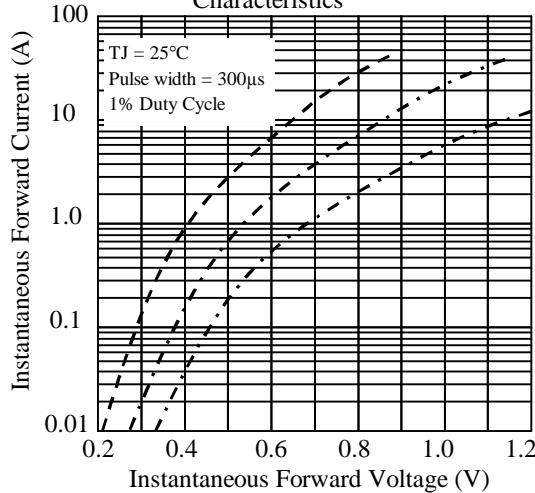


Fig. 5. - typical transient thermal impedance

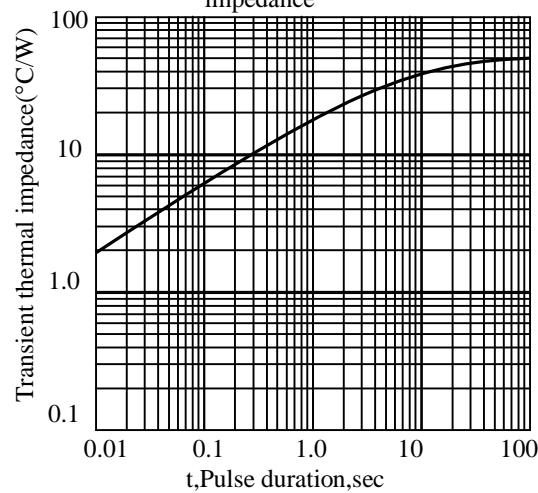


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

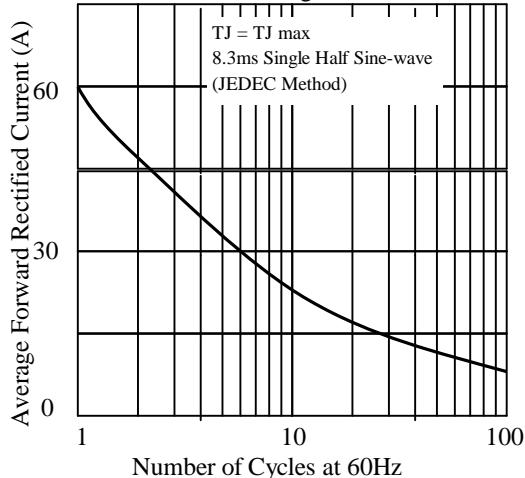


Fig. 4. - Typical Reverse Characteristics



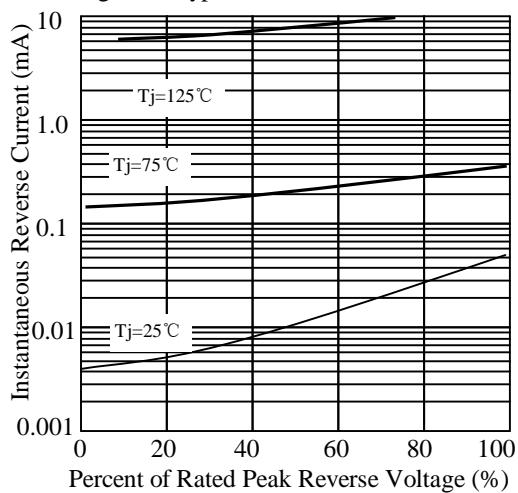


Fig. 6. - Typical Junction Capacitance

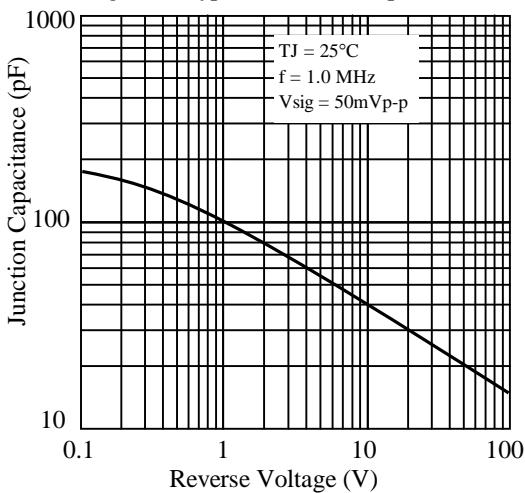

SB220 thru SB2100

3. dimension:

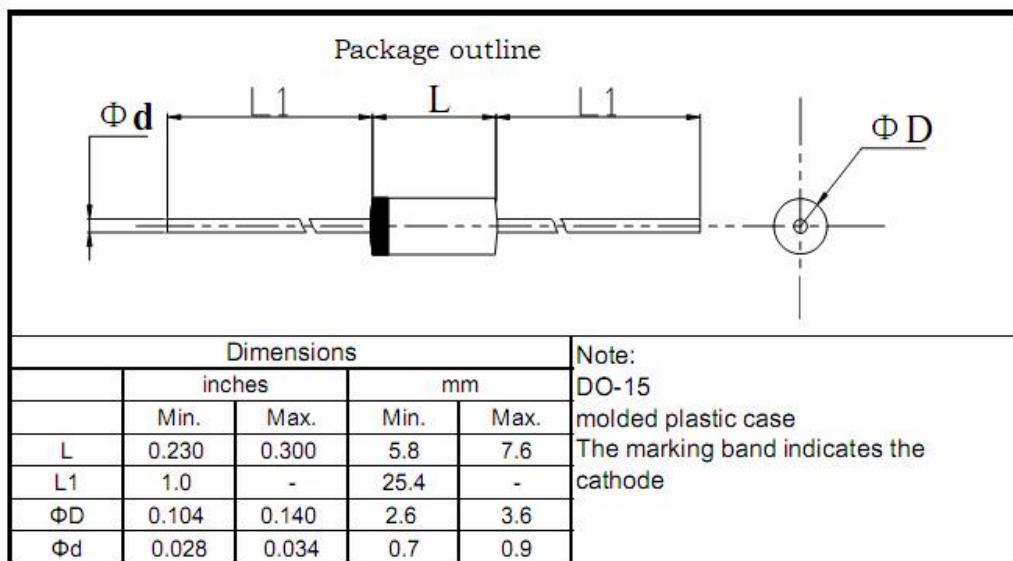

SB220 thru SB2100

4. Update Record

版次	更新记录	更新作者	更新日期
1	第一版	余波	2010.5-26
2	调整结温为150度	周杰	2010.09.26