

# SM220A thru SM2100A

Schottky Barrier Rectifiers  
Reverse Voltage 20 to100V

## FEATURES

- \* Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- \* Low power loss,high efficiency
- \* For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- \* Guardring for over voltage protection
- \* High temperature soldering guaranteed: 260°C/10 seconds at terminals

## Mechanical Data

**Case:** JEDEC DO-214AC,  
molded plastic over glass die


**Terminals:** Plated axial leads, solderable per  
MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.0023 oz., 0.065 g

**Handling precaution:** None

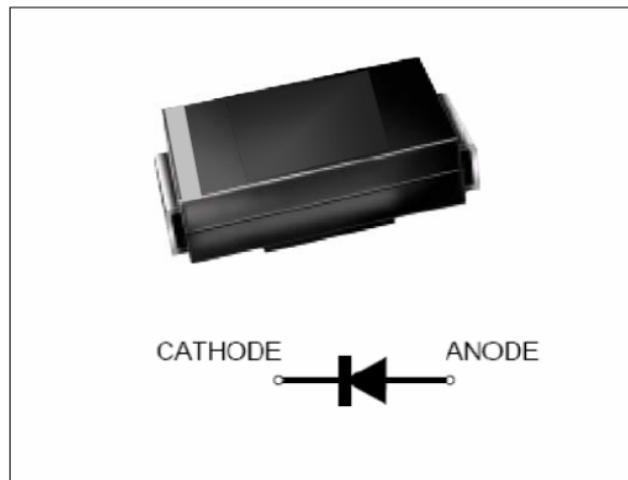

We declare that the material of product compliance  
with ROHS requirements

## 1. Maximum & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	SM220A	SM230A	SM240A	SM250A	SM260A	SM280A	SM2100 A	Unit
device marking code		S22	S23	S24	S25	S26	S28	S210	
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	50	60	80	100	V
Maximum RSM voltage	V <sub>RSM</sub>	14	21	28	35	42	56	70	V
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	50	60	80	100	V
Maximum average forward rectified current (See fig. 1)	IF(AV)	2.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	60							A
Typical thermal resistance (Note 1)	R <sub>θJA</sub>	150							°C/W
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	-40 to +150							°C

## Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	SM220A	SM230A	SM240A	SM250A	SM260A	SM280A	SM2100 A	Unit
Maximum instantaneous forward voltage at 2.0A	V <sub>F</sub>	0.50		0.70		0.85		V	
Maximum DC reverse current TA = 25°C at rated DC blocking voltage TA = 100°C	I <sub>R</sub>	0.5		10.0				mA	
Typical junction capacitance at 4.0V, 1MHz	C <sub>J</sub>	110							PF

NOTES:

1. 8.0mm<sup>2</sup> (.013mm thick) land areas

# SM220A thru SM2100A

## 2.Ratings and Characteristic Curves ( TA = 25°C unless otherwise noted )

Fig. 1 - Forward Current Derating Curve

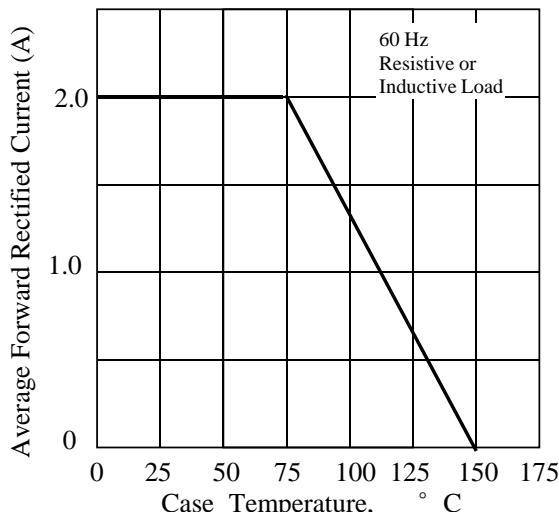


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

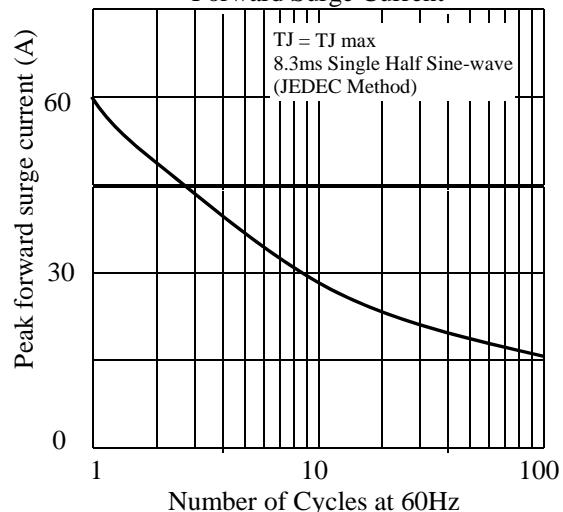


Fig 3. - Typical Instantaneous Forward Characteristics

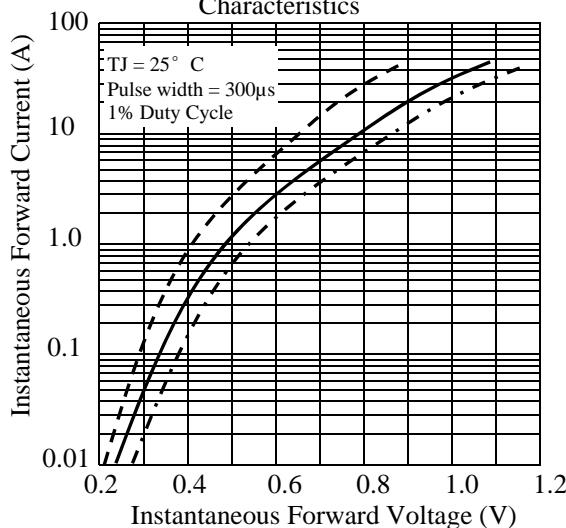


Fig 4. - Typical Reverse Characteristics

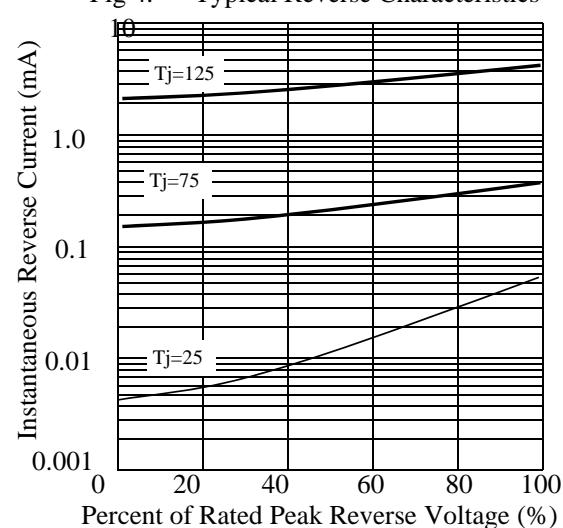


Fig 5. - typical transient thermal impedance


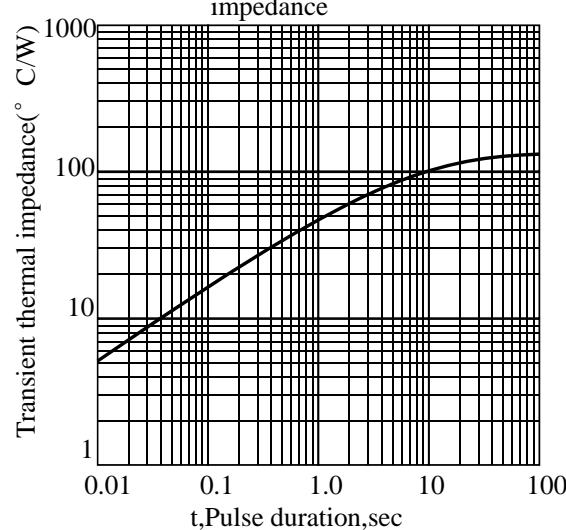


Fig 6. - Typical Junction Capacitance



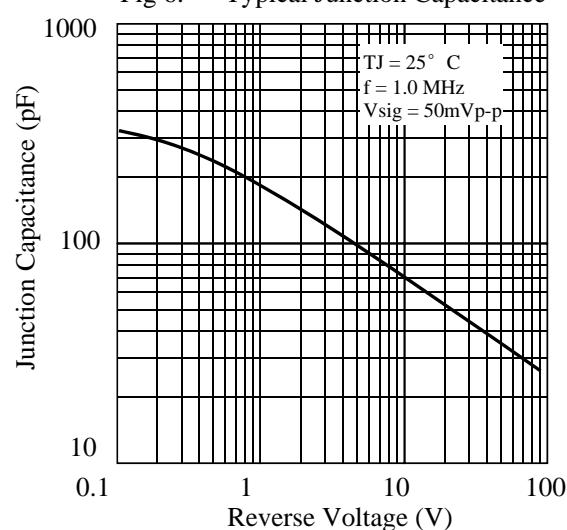

乐山无线电股份有限公司  
Leshan Radio Company, Ltd

## SM220A thru SM2100A

### 3. dimension:

Package outline

Dimensions				
	inches		mm	
	Min.	Max.	Min.	Max.
A	0.086	0.110	2.2	2.8
B	0.051	0.067	1.3	1.7
C	0.185	0.209	4.7	5.3
D	0.067	0.100	1.7	2.55
E	0.035	0.059	0.9	1.5
F	0.035	0.059	0.9	1.5

Note:  
DO-214AC  
molded plastic case  
The marking band indicates the cathode



Mounting Pad Layout  
---SMA

