


ABS2 Thru ABS10

High Current Glass Passivated Molding Single-Phase Bridge Rectifier

Reverse Voltage 200 to 1000V Forward Current 1.0 A

FEATURES

- Plastic Package has Underwriters Laboratory Flammability Classification 94V-0
- High current capacity with small package
- Glass passivated chip junctions
- Superior thermal conductivity
- High IFSM

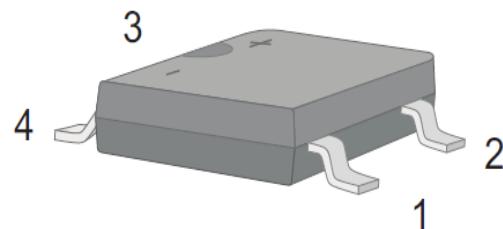

1. Maximum & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	Symbol	ABS2	ABS4	ABS6	ABS8	ABS10	Unit
Maximum repetitive voltage	VRRM	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	200	400	600	800	1000	V
Maximum DC reverse current TA=25 °C	IR			5			µA
Average rectified output current, @60Hz sine wave, R-load, Ta=40°C, on Alumina Substrate	Io			1.0			A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	IFSM			35			A
Rating of fusing (t<8.3ms)	I ² t			5			A ² sec
Max instantaneous forward voltage at 1.0A	VF			0.95			V
Thermal Resistance Between junction and ambient on AL substrate	R _{θJ-A}			62.5			°C/W
Thermal Resistance Between junction and lead	R _{θJ-L}			25			
Operating junction temperature	T _J			-55~150			°C
Storage temperature	T _{stg}			-55~150			°C

ABS2 Thru ABS10

2. Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 Derating Curve

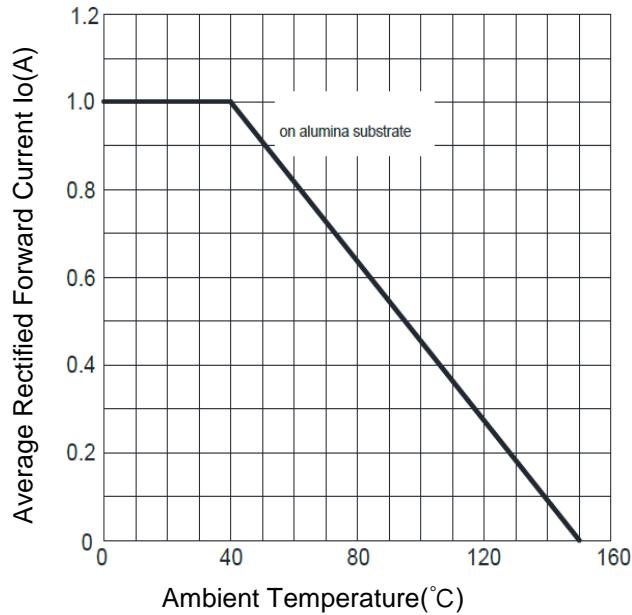


Fig.2 Typical Reverse Characteristics

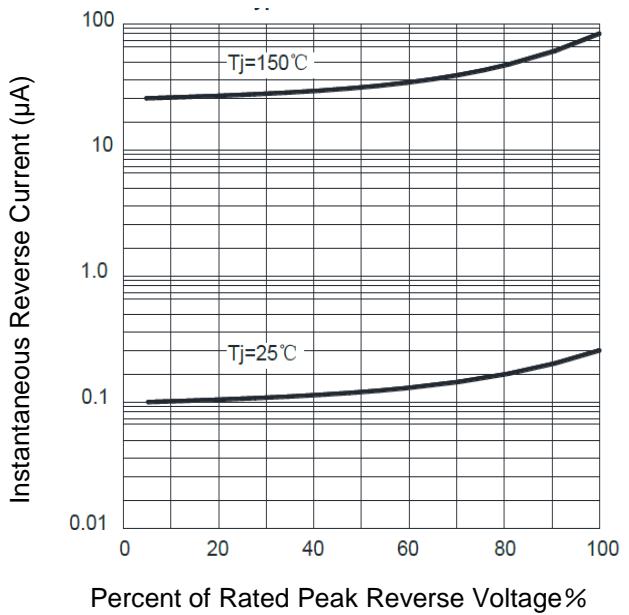


Fig.3 Forward Voltage



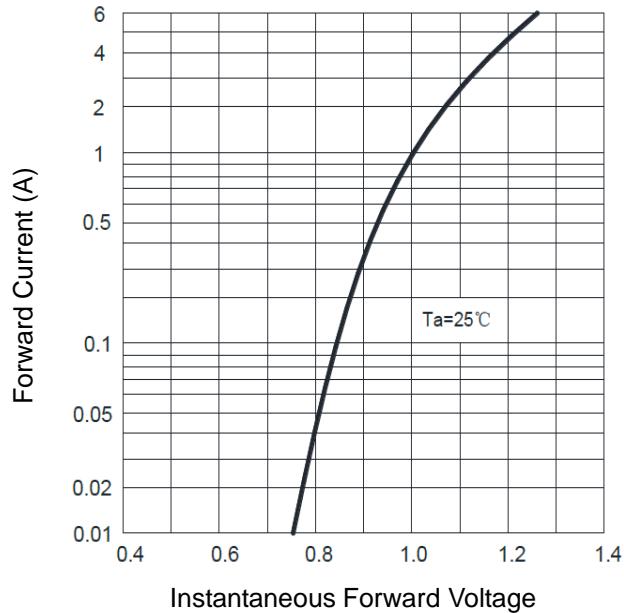


Fig.4 Peak Surge Forward Capability

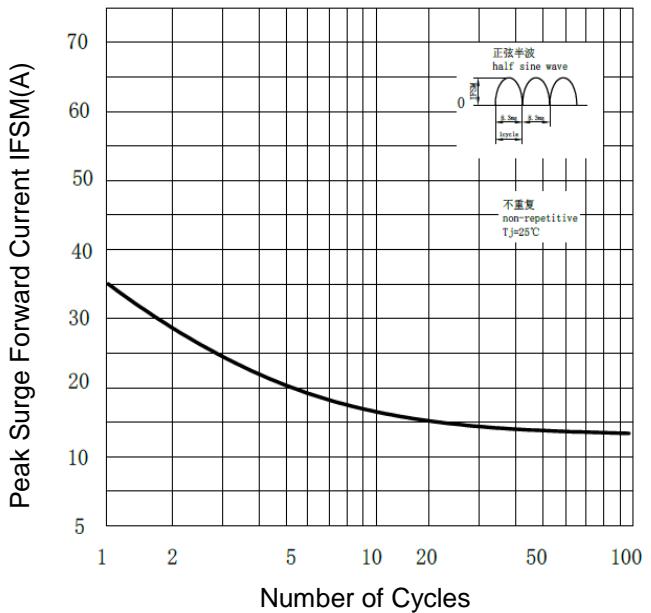

ABS2 Thru ABS10

3. Marking Identification

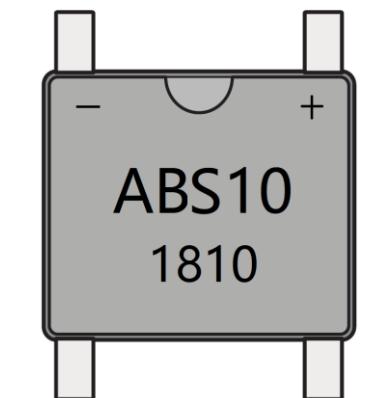

Note:


生产日期码包含4位数字，例如“1810”，前两个数字“18”表示为2018年，另外二个数字“10”是指第10周，即表示该产品为2018年10周生产。

型号：

ABS 10

bridge reverse voltage=1000V
Mean: ABS series bridge


4. Dimension(Unit: inch/mm)

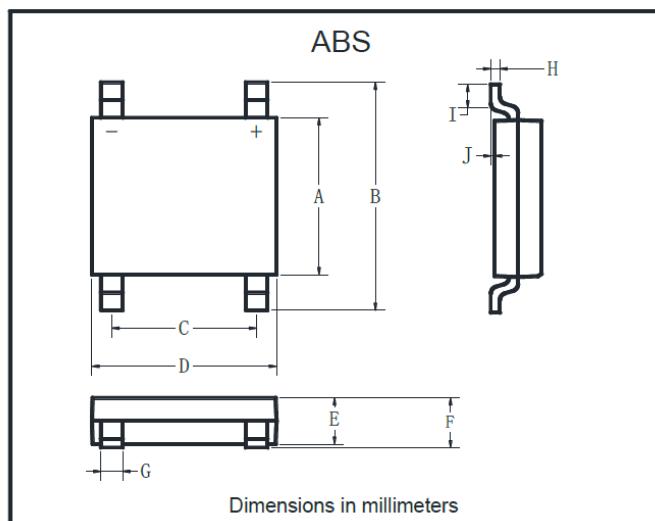

ABS		
Dim	Min	Max
A	4.30	4.50
B	6.00	6.40
C	3.90	4.10
D	4.90	5.10
E	1.25	1.45
F	1.60 Max	
G	0.60	0.70
H	0.15	0.25
I	0.30	0.80
J	0.02	0.15

ABS2 Thru ABS10

5. Standard Soldering Pad (Unit: mm/mil)

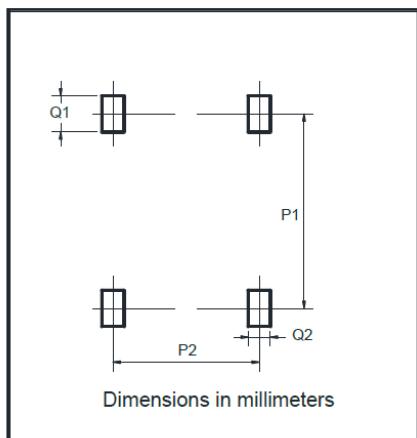

Dim	Min
P1	5.72
P2	4.00
Q1	1.00
Q2	0.90