

STSB152 thru STSB157

low Profile Surface Mount Single Phase Bridge Rectifiers

Reverse Voltage 100 to1000V Forward Current 1.5A

FEATURES

- * Low forward voltage drop
- * Low leakage current
- * Ideal for automated placement
- * Glass passivated standard bridge rectifiers
- * Moisture sensitivity: level 1
- * Low profile, Typical Height 1.4mm
- * High temperature soldering guaranteed:
260°C/10 seconds
- * Weight: 0.195g



Typical Applications

For use of general purpose AC to DC bridge rectification in power supply, charger, office appliance, home appliance and telecome device

We declare that the material of product is Halogen free (green epoxy compound)

1. Maximum Ratings at 25°C unless otherwise noted

Parameter Symbol	symbol	STSB152	STSB153	STSB154	STSB155	STSB156	STSB157	Unit
device marking code		STSB152	STSB153	STSB154	STSB155	STSB156	STSB157	
Maximum repetitive peak reverse voltage	V_{RRM}	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	100	200	400	600	800	1000	V
Maximum average forward rectified current	$IF(AV)$				1.5			A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	I_{FSM}				60			A
Rating for fusing ($t < 8.3\text{ms}$)	I^2t				10			A^2sec
Typical thermal resistance (Note 1)	$R_{\theta JC}$ $R_{\theta JA}$				15 75			$^{\circ}\text{C}/\text{W}$
Operating junction and storage temperature range	TJ, TSTG				-55 to +150			$^{\circ}\text{C}$

Electrical Characteristics at 25°C unless otherwise noted

Parameter Symbol	symbol	STSB152	STSB153	STSB154	STSB155	STSB156	STSB157	Unit
Maximum Instantaneous Forward Voltage ($IF = 1.5\text{Amps}, TJ = 25^{\circ}\text{C}$)	V_F				1.05			V
Maximum DC reverse current at rated DC blocking voltage TA= 25°C TA =125°C	IR				5 500			μA
Typical junction capacitance at 4.0V, 1MHz	CJ				32			PF

NOTES:

1. 16.0mm² (.013mm thick) land areas

STSB152 thru STSB157

2. Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 - Forward Current Derating Curve

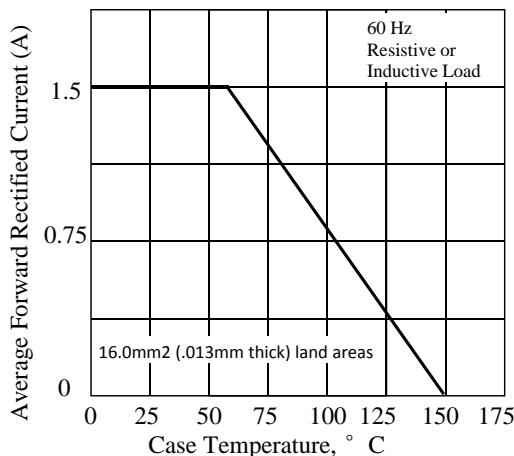


Fig. 3. - Typical Instantaneous Forward Characteristics

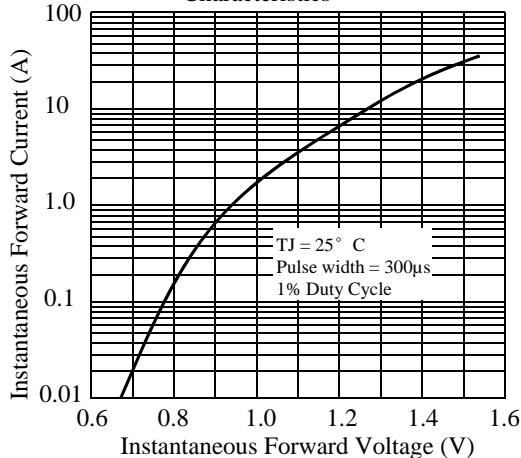


Fig 5. - typical transient thermal impedance

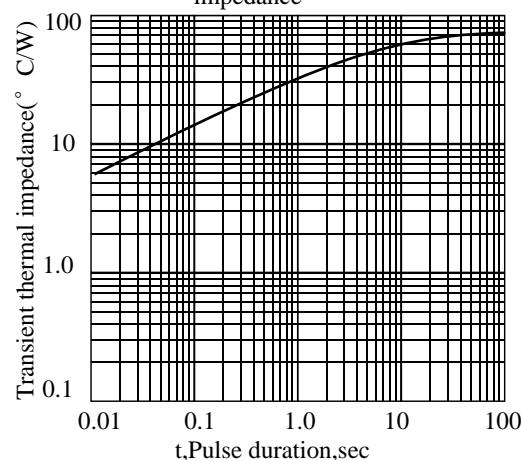


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

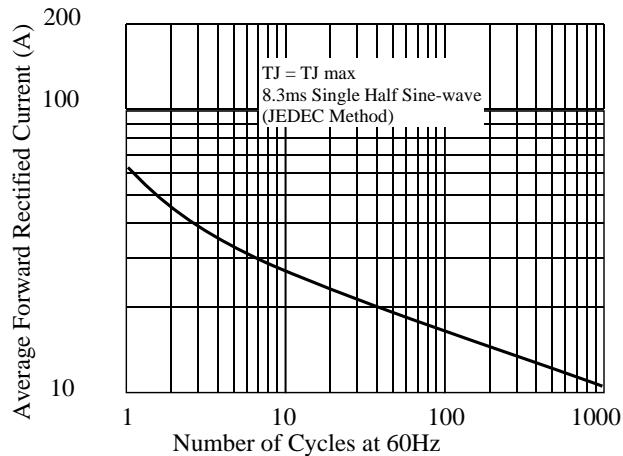


Fig 4. - Typical Reverse Characteristics


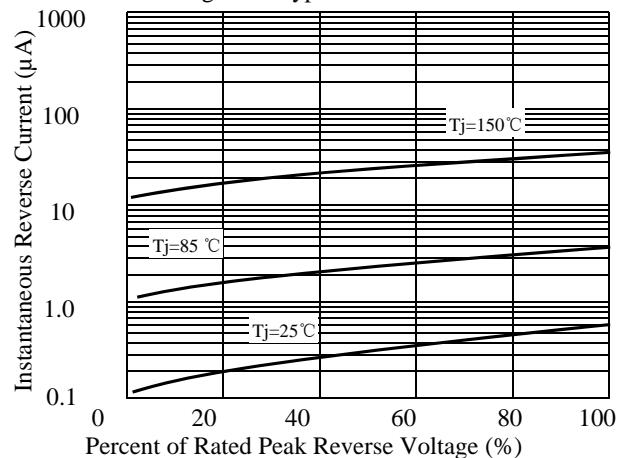




Fig 6. - Typical Junction Capacitance

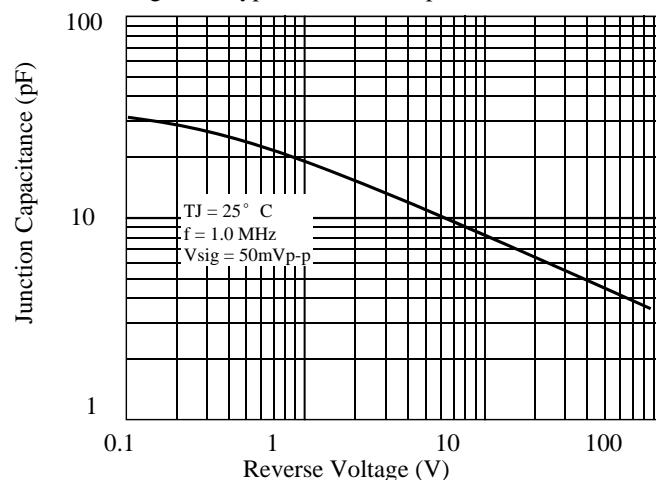


STSB152 thru STSB157

3. dimension:

STSB

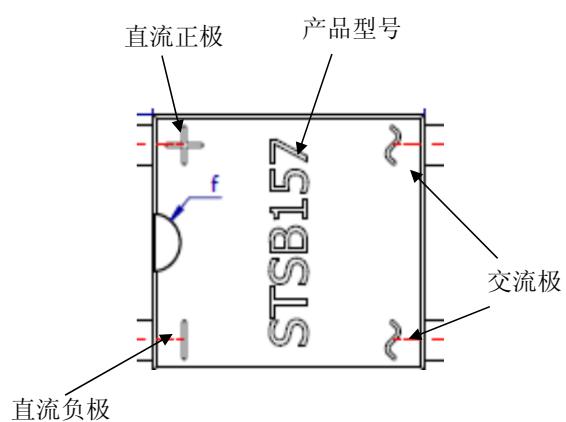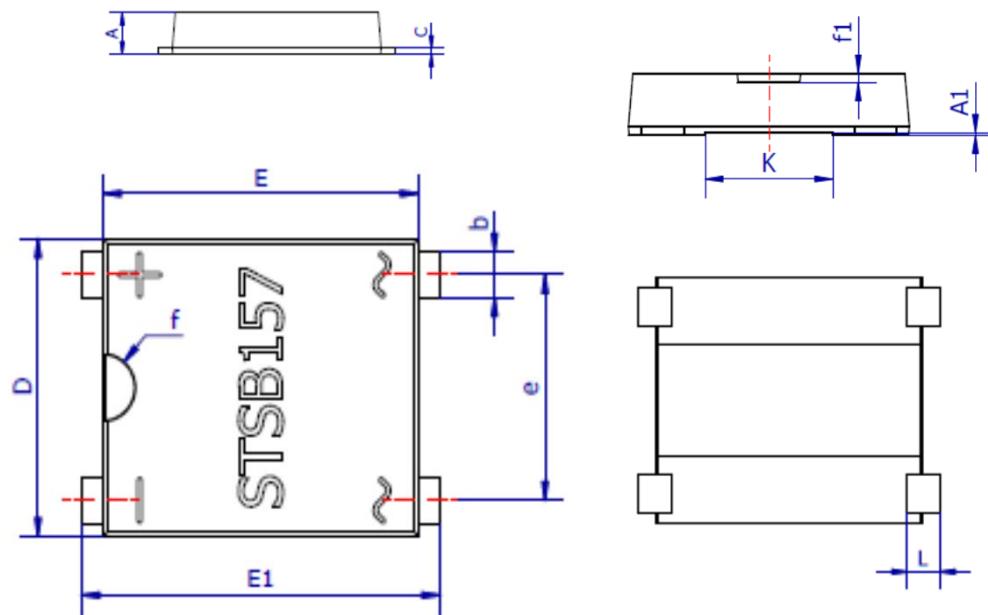

Mounting PAD layout

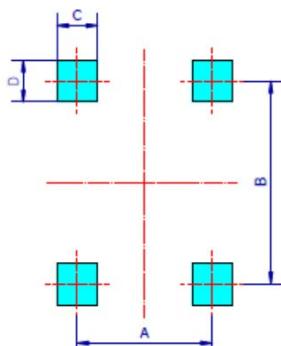

产品型号说明: ST--小型薄形管体; S---贴片;
B---桥; 15--IF=1.5A;07--VR=1000V;

Dim	MIN	MAX
A	4.75	5.25
B	7.15	7.65
C	1.50	2.50
D	1.50	2.50

STSB152 thru STSB157

4、版式次更新记录

版次	更新记录	更新作者	更新日期
1	设计试用版	周杰	2016. 05. 10
2	完善热阻参数	谭志伟	2016. 06. 20