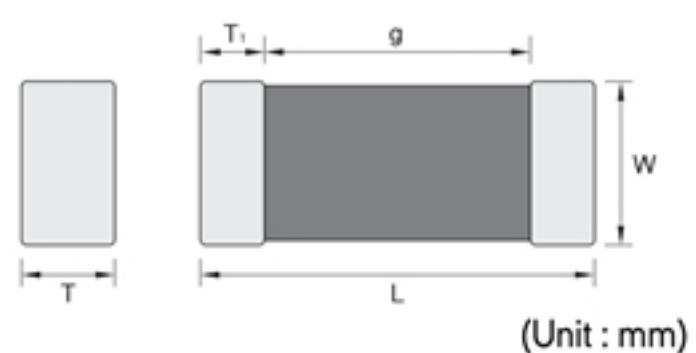
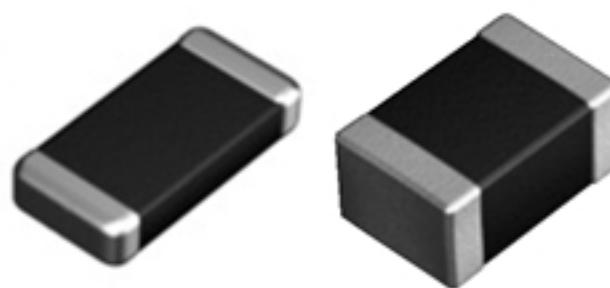


SMD Type**Shape & Dimensions**

Code(inch)	Dimensions					T1(min)	
	Length		Width		Tol(±)		
	L	Tol(±)	W	Tol(±)			
0603(0201)	0.60	0.03	0.30	0.03		0.05	
1005(0402)	1.00	0.05	0.50	0.05		0.05	
1608(0603)	1.60	0.15	0.80	0.10		0.10	
2012(0805)	2.00	0.20	1.25	0.15		0.10	
3216(1206)	3.20	0.30	1.60	0.20		0.15	
3225(1210)	3.20	0.40	2.50	0.25		0.15	
4520(1808)	4.50	0.40	2.00	0.25		0.20	
4532(1812)	4.50	0.40	3.20	0.30		0.20	
5750(2220)	5.70	0.50	5.00	0.40		0.30	

*1608 Size $\geq 10\mu F \Rightarrow W: 0.8 \pm 0.15, T: 0.8 \pm 0.15$

How to Order (Product Identification)

CS 1608 X7R 104 K 160 N R B

1 2 3 4 5 6 7 8 9

1 Type

CS : SMD

SA : ARRAY

2 Size Code

This is expressed in tens of a millimeter.

The first two digits are the length, the last two digits are width.

Size(mm)	0603	1005	1608	2012	3216	3225	4520	4532	5750

3 Temperature Coefficient Code

Temperature Characteristic	Temperature Range	Capacitance Change or Temperature Coefficient	Operating Temperature Range
C0G	-55 to 125°C	0 \pm 30ppm/°C	-55 to 125°C
X7R	-55 to 125°C	\pm 15%	-55 to 125°C
X5R	-55 to 85°C	\pm 15%	-55 to 85°C
Y5V	-30 to 85°C	+22, -82%	-30 to 85°C

4 Capacitance Code(Pico Farads)

The nominal capacitance value in pF is expressed by three digit numbers.

The first two digits represents significant figures and the last digit denotes the number of zero

Ex.) 104 = 100000pF R denotes decimal 8R2 = 8.2pF

5 Capacitance Tolerance Code

Code	Tolerance	Code	Tolerance
B	$\pm 0.1\text{pF}$	M	$\pm 20\%$
C	$\pm 0.25\text{pF}$	P	+100, -0%
D	$\pm 0.5\text{pF}$	Z	+80, -20%
F	$\pm 1.0\%$	H	+0.25/-0pF
G	$\pm 2.0\%$	I	+0/-0.25pF
J	$\pm 5\%$	U	+5/-0%
K	$\pm 10\%$	V	+0/-5%

6 Voltage Code

Code	6R3	100	160	250	500	101	201	251	631	302
Vol.	DC 6.3V	DC 10V	DC 16V	DC 25V	DC 50V	DC 100V	DC 200V	DC 250V	DC 630V	DC 3000V

7 Termination Code

Ex.) N : Ni-Sn(Nickel-Tin Plate)

8 Packing Code

Ex.) R : Reel Type B : Bulk Type

9 Thickness Option

Thickness(mm)		Code	Thickness(mm)		Code
t	Tol(±)		t	Tol(±)	
0.30	0.03	Blank	1.30	0.20	E
0.50	0.05	Blank	1.35	0.20	H
0.60	0.10	A	1.60	0.20	I
0.80	0.10	B	1.80	0.20	J
0.85	0.15	B	2.00	0.25	K
1.00	0.15	E	2.50	0.25	L
1.10	0.15	E	2.80	0.30	M
1.15	0.15	E	3.20	0.30	N
1.25	0.15	E	5.00	0.40	O

Typical Performance Characteristics


COG

Application

Suited for precision circuits, requiring stable dielectric characteristics, negligible dependence of capacitance and dissipation factor on time, voltage and frequency.

Dielectric Characteristics

Temperature Characteristic	$0 \pm 30\text{ppm}/^\circ\text{C}$
Operating Temperature	-55~125°C
Capacitance Tolerance	>10pF : $\pm 5\%$, $\pm 10\%$, ($\pm 1\%$, $\pm 2\%$, $\pm 20\%$) ≤10pF : $\pm 0.1\text{pF}$, $\pm 0.25\text{pF}$, $\pm 0.5\text{pF}$
Dissipation Factor & Q	$\geq 30\text{pF}$: DF $\leq 0.1\%$, Q ≥ 1000 $< 30\text{pF}$: Q $\geq 400 + 20 \times C$
Insulation Resistance	More than $10,000\text{M}\Omega$ or 500QF (Whichever is smaller)
Dielectric Strength	$> 3 \times R_{VDC}$
Test Voltage	0.5 to 5Vrms ($\leq 1000\text{pF}$), $1 \pm 0.2\text{Vrms} (> 1000\text{pF})$
Test Frequency	$1 \pm 0.1\text{MHz} (\leq 1000\text{pF})$, $1 \pm 0.1\text{kHz} (> 1000\text{pF})$

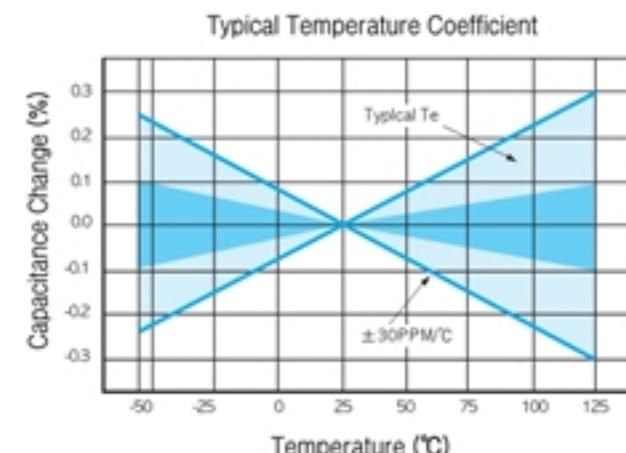

Appendix |

C0G-Temperature Compensating Type(0603~3216)

Type Size(inch) Volt(V) Cap.	C0G									
	0603(0201)		1005(0402)		1608(0603)		2012(0805)		3216(1206)	
	25	50	25	50	25	50	25	50	25	50
0.5pF(0R5)										
1pF(010)										
2pF(020)										
3pF(030)										
4pF(040)										
5pF(050)										
6pF(060)										
7pF(070)										
8pF(080)										
9pF(090)										
10pF(100)										
12pF(120)										
15pF(150)										
18pF(180)										
22pF(220)										
27pF(270)										
33pF(330)										
39pF(390)										
47pF(470)										
56pF(560)										
68pF(680)										
82pF(820)										
100pF(101)	0.3									
120pF(121)										
150pF(151)										
180pF(181)										
220pF(221)										
270pF(271)										
330pF(331)										
390pF(391)										
470pF(471)										
560pF(561)										
680pF(681)										
820pF(821)										
1000pF(102)	0.5	0.5								
1200pF(122)										
1500pF(152)									1.15	1.15
1800pF(182)										
2200pF(222)										
2700pF(272)										
3300pF(332)					0.8	0.8				
3900pF(392)										
4700pF(472)										
5600pF(562)										
6800pF(682)										
8200pF(822)										
10000pF(103)								1.25	1.25	
12000pF(123)										
15000pF(153)										
18000pF(183)										
22000pF(223)										
27000pF(273)										
33000pF(333)										
47000pF(473)										
56000pF(563)									1.60	1.60
68000pF(683)										
82000pF(823)										
0.1μF(104)										

Temperature Compensating Type : Dissipation Factor Page 22 (No.5)