

BAS19H Thur BAS21H

CREATEK Microelectronics

Switching Diode in SOD-323

Features

- Low Reverse Current
- Surface Mount Package Ideally Suited for Automatic Insertion
- Fast Switching Speed
- For General Purpose Switching Applications

Mechanical Data

- Case: SOD-323 (plastic package). Lead free; RoHS compliant
- Molding Compound Flammability Rating: UL 94 V-0
- **Terminals:** High temperature soldering guaranteed: 260 °C/10 sec. at terminals





Applications

- High Speed Switching and Reverse Polarity Protection
- High Speed Rectifying Applications
- Consumer, Automotive and Telecommunication Industry

Absolute Maximum Ratings

Ratings at 25 °C, ambient temperature unless otherwise specified

Symbol	Parameter	Value			Unit	
Symbol	Parameter	BAS19H	BAS20H	BAS21H	Oilit	
V_{RM}	Non-Repetitive Peak Reverse Voltage	120	200	250	V	
V _{RRM}	Peak Repetitive Reverse Voltage	100 150 200		200		
V _{RWM}	Working Peak Reverse Voltage	100	150	200	V	
V _{R(RMS)}	RMS Reverse Voltage	71	106	141	V	
lo	Average Rectified Output Current 200				mA	
I _{FSM}	Non-repetitive Peak Forward Surge Current @ t=8.3ms 2.0				Α	
P _D	Power Dissipation 2		250		mW	
R _{OJA}	Thermal Resistance from Junction to Ambient	500			°C/W	
Tj	Junction Temperature	150			°C	
T _{stg}	Storage Temperature	-55~+150			°C	

Electrical Characteristics

(T_A = 25 °C unless otherwise specified)


Parameter	Symbol	Test conditions		Min	Тур	Max	Unit
Reverse current		V _R =100V	BAS19H			0.1	
	I _R	V _R =150V	BAS20H			0.1	uA
		V _R =200V	BAS21H			0.1	
Forward voltage	\/	I _F =100mA				1	V
Forward voltage	V _F	I _F =200mA				1.25	V
Total capacitance	C _{tot}	V _R =0V,f=1MHz				5	pF
Reverse recovery time	t _{rr}	$I_F = I_R = 30 \text{mA}, I_{rr} = 0.1 \cdot I_R, R_L = 100 \Omega$				50	ns





BAS19H Thur BAS21H


CREATEK Microelectronics

Typical Characteristics (T_{amb} = 25 °C unless otherwise specified)

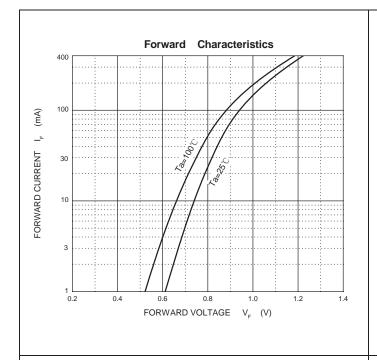

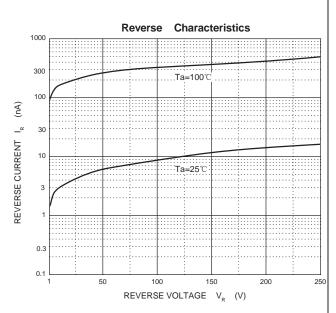

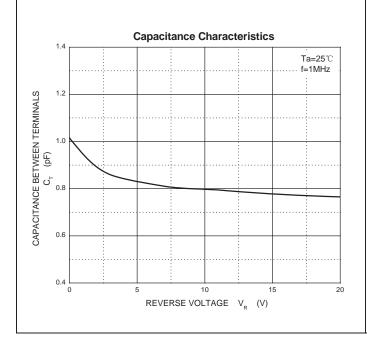


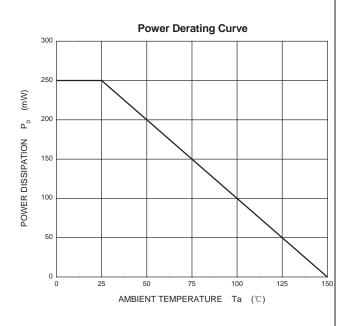

Rev. 1.0, 23-May-2012 www.crea-tek.com

CREATEK Microelectronics

Package Dimensions

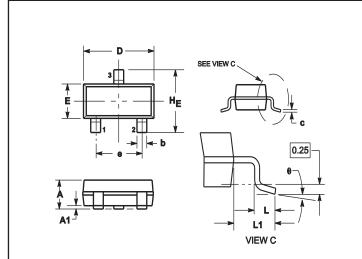

	MILLIMETERS			INCHES		
DIM	MIN	NOM	MAX	MIN	NOM	MAX
Α	0.89	1	1.11	0.035	0.04	0.044
A1	0.01	0.06	0.1	0.001	0.002	0.004
b	0.37	0.44	0.5	0.015	0.018	0.02
С	0.09	0.13	0.18	0.003	0.005	0.007
D	2.80	2.9	3.04	0.11	0.114	0.12
Е	1.20	1.3	1.4	0.047	0.051	0.055
е	1.78	1.9	2.04	0.07	0.075	0.081
L	0.10	0.2	0.3	0.004	0.008	0.012
L1	0.35	0.54	0.69	0.014	0.021	0.029
H _E	2.10	2.4	2.64	0.083	0.094	0.104
θ	0°		10°	0°		10°

Ordering information

Order code	Package	Packaging option	Base quantity	Packaging specification
BAS19H Thur BAS21H	SOD-323	Tape and reel	3000pcs / reel	EIA STD RS-481

Revision history

Date	Revision	Changes
23-May-2012	1.0	Initial release

Rev. 1.0, 23-May-2012 www.crea-tek.com



BAS19H Thur BAS21H

CREATEK Microelectronics

CAUTION / WARNING

Information in this document is believed to be accurate and reliable. However, CREATEK does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Users should independently evaluate the suitability of and test each product selected for their own applications, and CREATEK assumes no liability whatsoever relating to the choice, selection or use of the CREATEK products and services described herein.

CREATEK reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product.

Information in this document supersedes and replaces all information previously supplied.

Products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an CREATEK product can reasonably be expected to result in personal injury, death or severe property or environmental damage. CREATEK accepts no liability for inclusion and/or use of CREATEK products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Resale of CREATEK products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by CREATEK for the CREATEK product or service described herein and shall not create or extend in any manner whatsoever, any liability of CREATEK.

CREATEK expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. CREATEK only obligations are those in the CREATEK Standard Terms and Conditions of Sale and in no case will CREATEK be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.

Specifications are subject to change without notice

© Copyright 2009, CREATEK Microelectronics

CREATEK® is a registered trademark of CREATEK Microelectronics

All rights reserved

Rev. 1.0, 23-May-2012 www.crea-tek.com